



2400HL



**RUGGED, LOW MAINTENANCE MOWERS FOR
TOPPING AND MOWING HAY AND SILAGE**



QUALITY PRODUCTS • AFFORDABLE PRICES



2400HL

technical specifications

CUTTING WIDTH	2.4 metres (8')
NUMBER OF DRUMS	2
NUMBER OF DOUBLE EDGE BLADES	8
POWER REQUIREMENT (at 540 rpm)	from 65 HP
DRUM r.p.m	1200
TRACTOR LINKAGE	CAT II
HEIGHT ADJUSTMENT	25-100mm (1" - 4")
WEIGHT	690kg (1520lbs)

PRICE



The wind-row spreader – spreads the mown crop evenly, decreasing drying time.




Wind-row effect of mown crop with wind-row spreader removed.



Speed and convenience of hydraulic lift operation.

OPTIONS

**options may
differ in your
country*

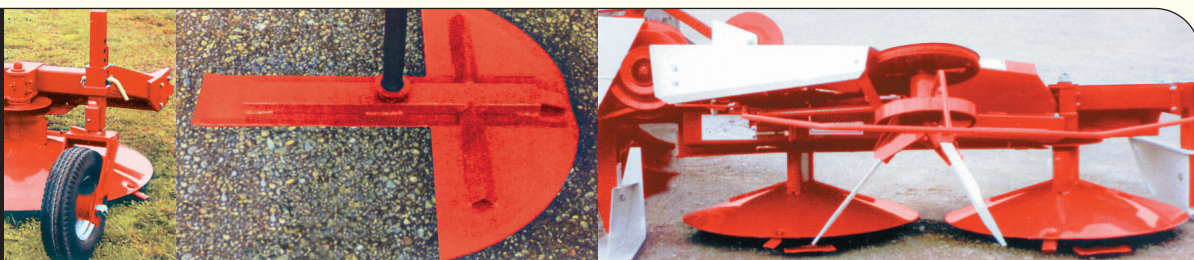

OPTIONS: Skid Replacement Wheel (above left), Stone guards (middle), Topping Skirt (not shown), Windrow Spreader (as shown above)

enquire now from your authorised dealer



FOR YOUR NEAREST DEALER AND
FURTHER INFORMATION CONTACT

New Zealand

REESE ENGINEERING LTD,
PALMERSTON NORTH, NEW ZEALAND.
TEL: 06 357 9323
FAX: 06 354 3155
email: reese@reese.co.nz
VISIT OUR WEBSITE: www.reeseagri.com

Australia

REESE ENGINEERING LTD,
PALMERSTON NORTH, NEW ZEALAND.
FREEPHONE 1-800-140-196
FREEFAX 1-800-140-195
email: reese@reese.co.nz
VISIT OUR WEBSITE: www.reeseagri.com
(Distribution Centre Geelong Vic.)

USA

REESE AGRI-USA,
BRAYMER, MISSOURI,
USA
TOLL FREE 800-432-4020
FAX (502) 4918072
email: reese@reese.co.nz
www.reeseagri.com